



CONTROLS


Isolator



Designed with the installer in mind. Large range of models and separate back plate for installation ease.

Key Features

- Separate back plate with spirit level for ease of installation
- 9 models available
- Surface mountable (with and without back plate)
- Removable switch for ease of wiring
- IP66 rated for interior and exterior use
- Lockable 'OFF' position (up to 2 padlocks) and 'ON' position (1 padlock), to prevent unauthorised access
- Fully compliant to IEC 60947-3
- 5 cable entry knock-outs
- Supplied with 2 cable glands

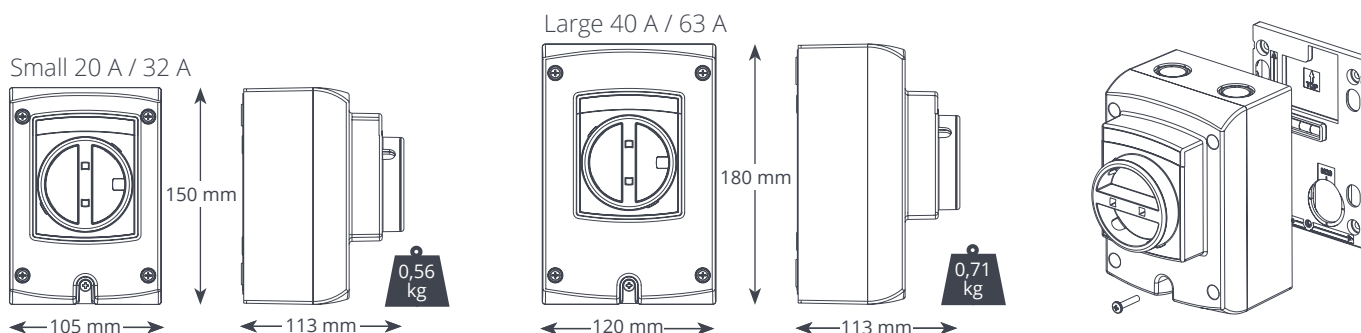

| SPECIFICATIONS | |
|----------------|---------|
| Rated | 415V AC |
| IP Protection | IP66 |

| SIZING OPTIONS | |
|---------------------|----------|
| Description | Part No. |
| 3-pole 20 A (small) | AX6101/2 |
| 3-pole 32 A (small) | AX6102/2 |
| 3-pole 40A (large) | AX6103/2 |
| 4-pole 20 A (small) | AX6001/2 |
| 4-pole 25 A (small) | AX6005/2 |
| 4-pole 32A (small) | AX6002/2 |
| 4-pole 40A (large) | AX6003/2 |
| 4-pole 63A (large) | AX6004/2 |

| IN THE BOX |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> • Isolator • Back plate with spirit level • M4 x 20mm screw • Install manual • 2 x M20 glands & nuts (Small Isolator) • 2 x M25 glands & nuts (Large Isolator) |

Raw material: Rigid, self-extinguishing, impact-resistant and UV-stabilised PVC.



For further details please refer to our website aspenpumps.com

Information correct at time of going to press. Not all products are available in all regions.