



Kitchen

BOILER CONDENSATE REMOVAL PUMP

Designed to take the heat! Extra quick & easy to fit, the Kitchen all-in-one boiler pump is designed to be fitted beneath domestic gas boilers and furnaces.



- 12 L/h max. flow
- 10m max. head (flow rate 4 L/h)
- 21dB(A)

Key Features


- Compact & discreet
- Mounts under boiler
- Quiet operation
- Clear removable reservoir

Suitability


- Up to 45kW / 153,000 Btu/h with condensate pH value >2.7
- **Perfect for...** Domestic gas fired condensing boilers & furnaces

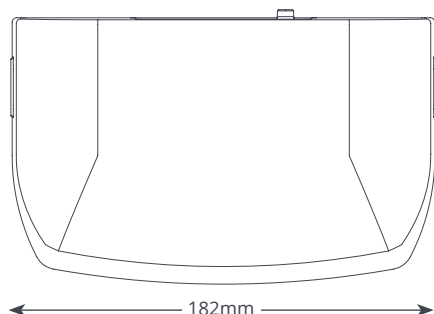

0.46 kg

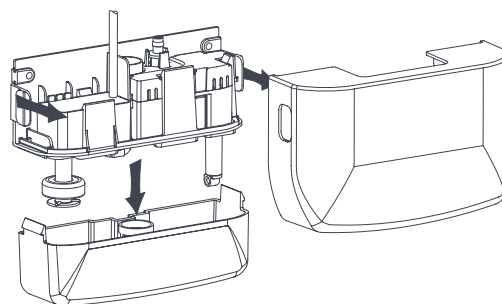

@ 230 VAC 50Hz	
Max. flow	12L/h @ 0m head
Max. rec. head	10m
Tank capacity	0.24L
dB(A) @1m	21dB(A)
Power supply	230 VAC, 50-60Hz, 0.1A
Rated	Non continuous
Class	II
Max. unit output	45kW (153,000 Btu/h)
Max. water output	60°C (140°F)
Inlet/Outlet	20mm in, 6 mm out
IP Protection	IP21
Safety Switch	3.0A Normally closed
Thermal protection	✓
Fully potted	✓
Self priming	n/a

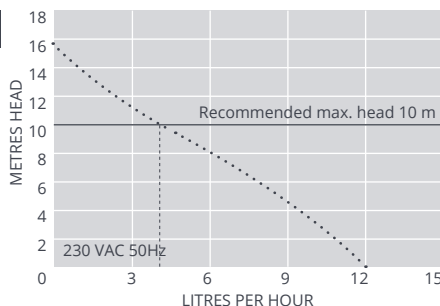

OPTIONS
Kitchen FP2943

SUGGESTED XTRA ACCESSORIES		
Description		Part No.
Tube Soil Stack Adaptor		FP2038
1 Amp Fuse		FP2620
Vinyl Tube Braided 3/8" (10 mm)		AX5100
Acid Neutraliser		FP1021

For more installation accessories take a look at our Aspen Xtra range

IN THE BOX	
Kitchen boiler pump (inc. 1m power cable) • 6m discharge tube (6mm ID) • Inlet adaptor for 22 & 28mm pipe • Pipe adaptor • Fixing kit • Install manual	

Download manual at aspenpumps.com