



APPROVALS



 **ENGINEERING CODE**
862FA51

 **APPROVED REFRIGERANT**
R-290

 **POWER SUPPLY**
220-240 V 50 Hz

 **STANDARD CONDITIONS**
EN12900

 **APPLICATION**
MBP

 **COOLING CAPACITY**
648 W (MBP)

 **EFFICIENCY**
1.8 W/W (MBP)

 **MOTOR TYPE**
CSIR

 **STARTING TORQUE**
HST

DATA

General Data

Type	Hermetic reciprocating
Technology Type	On-Off
Displacement	8.77 cm ³
Compressor Cooling	Fan/NotControlled/220
Fan Air Flow	520 m ³ /h
Expansion Device	Capillary Tube or Expansion Valve
Horse Power	1/3 hp
Max Condensing Pressure Operating	18.07 bar
Max Condensing Pressure Peak	20.17 bar
Power Supply	220-240 V 50 Hz
Evaporating Temperature Range	-20 °C to 10 °C

Electrical Data

Motor type	CSIR
Starting Torque	HST
Start Winding Resistance	27.92 Ω at 25° C
Run Winding Resistance	4.53 Ω at 25° C

Mechanical Data

Maximum Recommended Refrigerant Charge	150 g
Oil Charge	350 ml
Oil Type Configuration	ESTER
Oil Type Viscosity	ISO22
Pressurization	Without dry air charge
Weight	10.6 Kg
Free Internal Volume	2.1 L

Electrical Components

	Description
Motor Protection	MST26ALK-3259
Starting Device	Relay MTRP-0030*
Start Capacitor	53-64 Uf/330 V

External Characteristics

Base Plate		European	
Tray Holder		No	
Height		200 mm	
Connector	Internal Diameter		Shape
Suction	8.1 mm	Slanted 42°/Copper	
Discharge	6.1 mm	Straight/Copper	
Process	6.1 mm	Slanted 42°/Copper	

PERFORMANCE

Rated Points

Condensing Temperature	Evaporating Temperature	Cooling Capacity	Power Consumption	Gas Flow Rate	Efficiency
45.00°C	-10.00°C	648 W	360 W	7.97 kg/h	1.8 W/W

Test Condition: EN12900MBP, Fan/NotControlled/220, Return Gas 20°C, Evaporation -10.00°C, Condensing 45.00°C, Ambient 35°C , Liquid 45°C, Subcooling 0K. Data in accordance to EN

12900:2013 and AHRI 540:2015 polynomial equation and uncertainty guidance.

Performance Curve Data

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Power W	Gas Flow Rate kg/h	Efficiency W/W
-20	493	298	5.46	1.65
-15	615	317	6.85	1.94
-10	756	332	8.47	2.28
-5	919	344	10.36	2.67
0	1105	353	12.54	3.13
5	1314	359	15.04	3.66
10	1548	361	17.90	4.28

Test Condition: EN12900MBP, Fan/NotControlled/220, Return Gas 20°C, Ambient 35°C , Subcooling OK. Data in accordance to EN 12900:2013 and AHRI 540:2015 polynomial equation and uncertainty guidance.

Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Power W	Gas Flow Rate kg/h	Efficiency W/W
-20	416	314	5.07	1.33
-15	523	338	6.40	1.55
-10	648	360	7.97	1.8
-5	792	380	9.81	2.08
0	956	397	11.95	2.41
5	1143	413	14.42	2.77
10	1353	425	17.25	3.18


Test Condition: EN12900MBP, Fan/NotControlled/220, Return Gas 20°C, Ambient 35°C , Subcooling OK. Data in accordance to EN 12900:2013 and AHRI 540:2015 polynomial equation and uncertainty guidance.

Condensing Temperature 55°C


Evaporating Temperature °C	Cooling Capacity W	Power W	Gas Flow Rate kg/h	Efficiency W/W
-20	346	334	4.69	1.04
-15	436	360	5.95	1.21
-10	542	385	7.45	1.41
-5	666	409	9.23	1.63
0	809	431	11.31	1.88
5	972	451	13.73	2.16
10	1156	469	16.52	2.46

Test Condition: EN12900MBP, Fan/NotControlled/220, Return Gas 20°C, Ambient 35°C , Subcooling OK. Data in accordance to EN 12900:2013 and AHRI 540:2015 polynomial equation and uncertainty guidance.


Operating Envelope

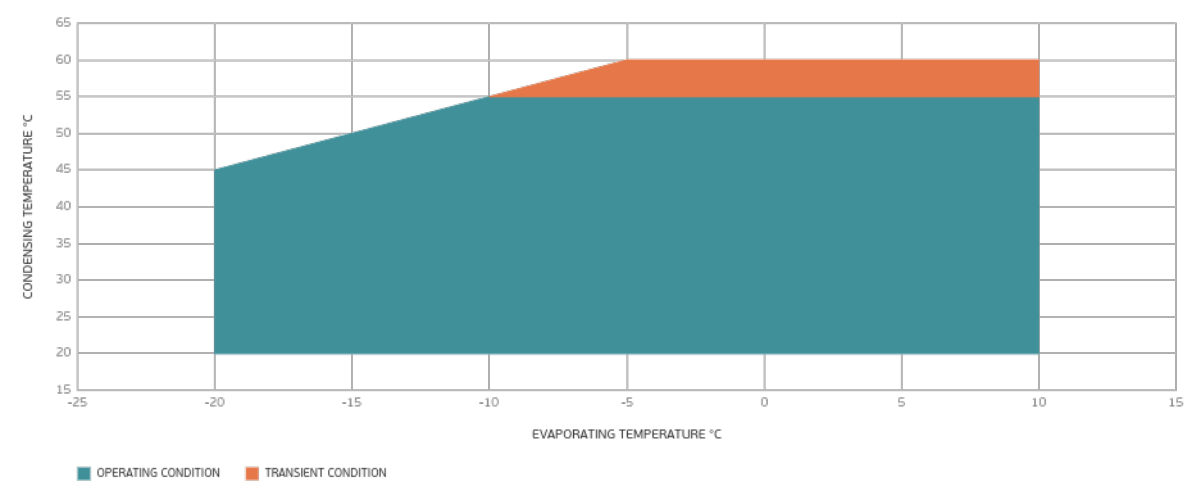

External Dimensions

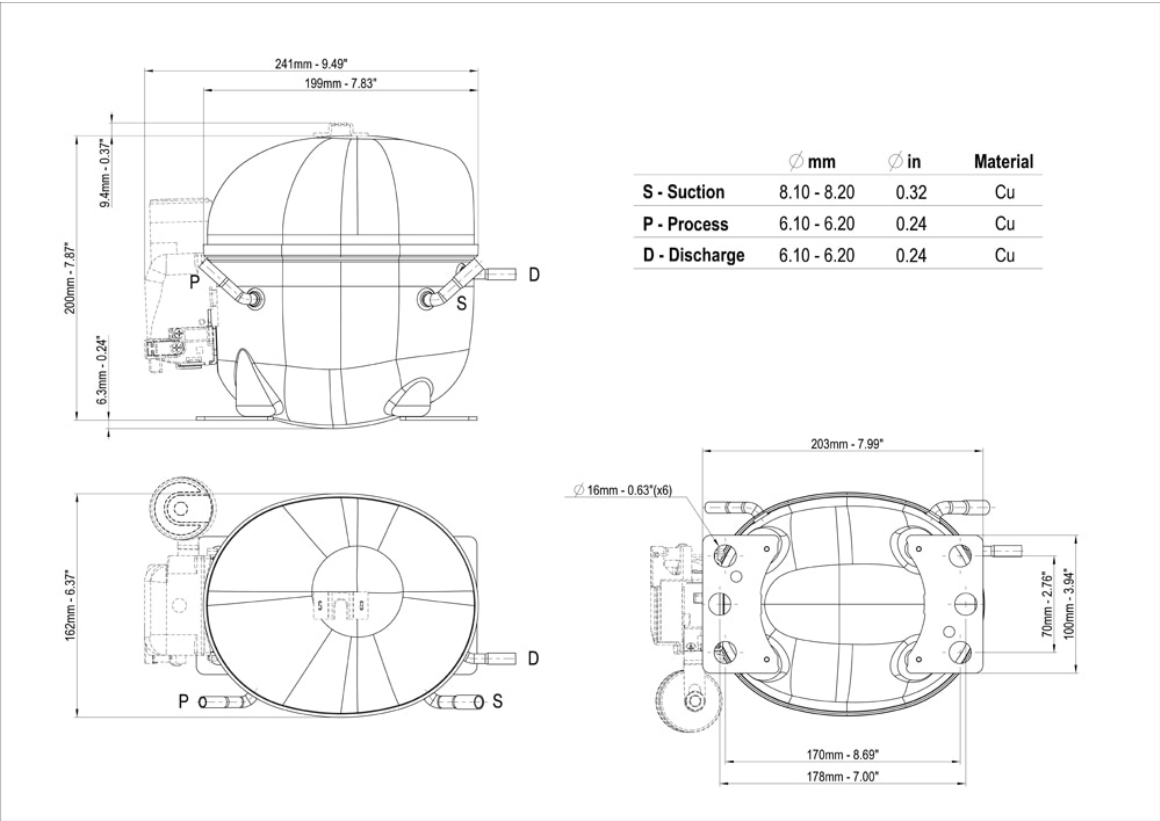

Wiring Diagram

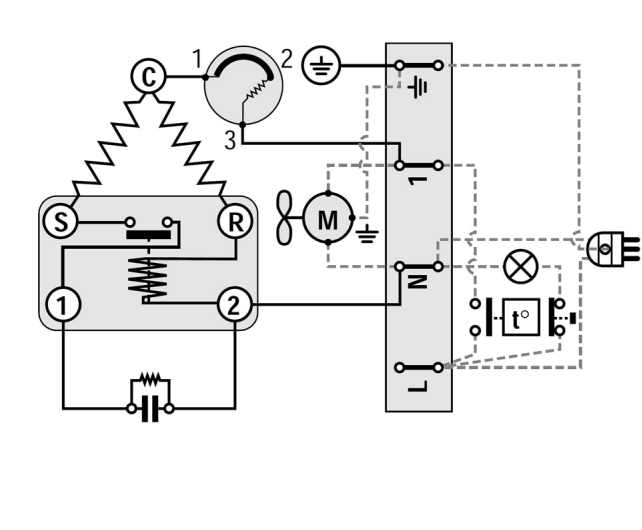

Assembly Instructions

